

# POLYURETHANE TUBE


Series WH

Cat No WH - 01 - 01 - A

## COLOURED POLYURETHANE TUBES - Ø4, 6, 8, 10, 12mm OD

### Advantages

- ❑ Provide differentiation of air line in pneumatic circuits

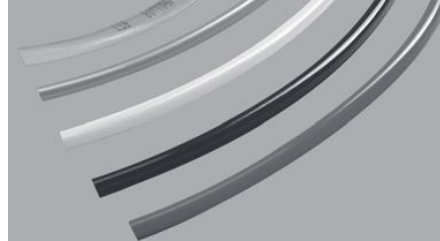

### Specifications

Medium	Compressed air
Maximum pressure	10 bar
Ambient temperature	5° to 60° C

### Usage instructions

( For maximum efficiency )

- ❑ Cut the tube - end burr free and square, using **Tube cutter ( WC1 )** and clean the edge to ensure leak tight joints. (Do not use blunt tools / hacksaw / chisel etc.,)
- ❑ Ensure the tube is fully inserted into the fitting - until the positive stop, beyond the 'U' seal.
- ❑ Minimum bend radius of the tubing to avoid leakage

Tube OD	Ø4	Ø6	Ø8	Ø10	Ø12
Minimum bend radius (in mm)	10	15	25	30	35

S. No.	Tube size		Tube Colour & Ordering No.				
	Tube OD	Tube ID	Silver	Transparent	Red	Black	Yellow
1	4	2	WH00S04	WH00T04	WH00R04	WH00K04	WH00Y04
2	6	4	WH00S06	WH00T06	WH00R06	WH00K06	WH00Y06
3	8	5	WH00S08	WH00T08	WH00R08	WH00K08	WH00Y08
4	10	7	WH00S10	WH00T10	WH00R10	WH00K10	WH00Y10
5	12	8	WH00S12	WH00T12	WH00R12	WH00K12	WH00Y12

### How to order

Ordering Example : Ø8 PU tube Transparent colour - WH00T08

Subject to change